





FREIO DE SEGURANÇA POR AÇÃO DE MOLAS

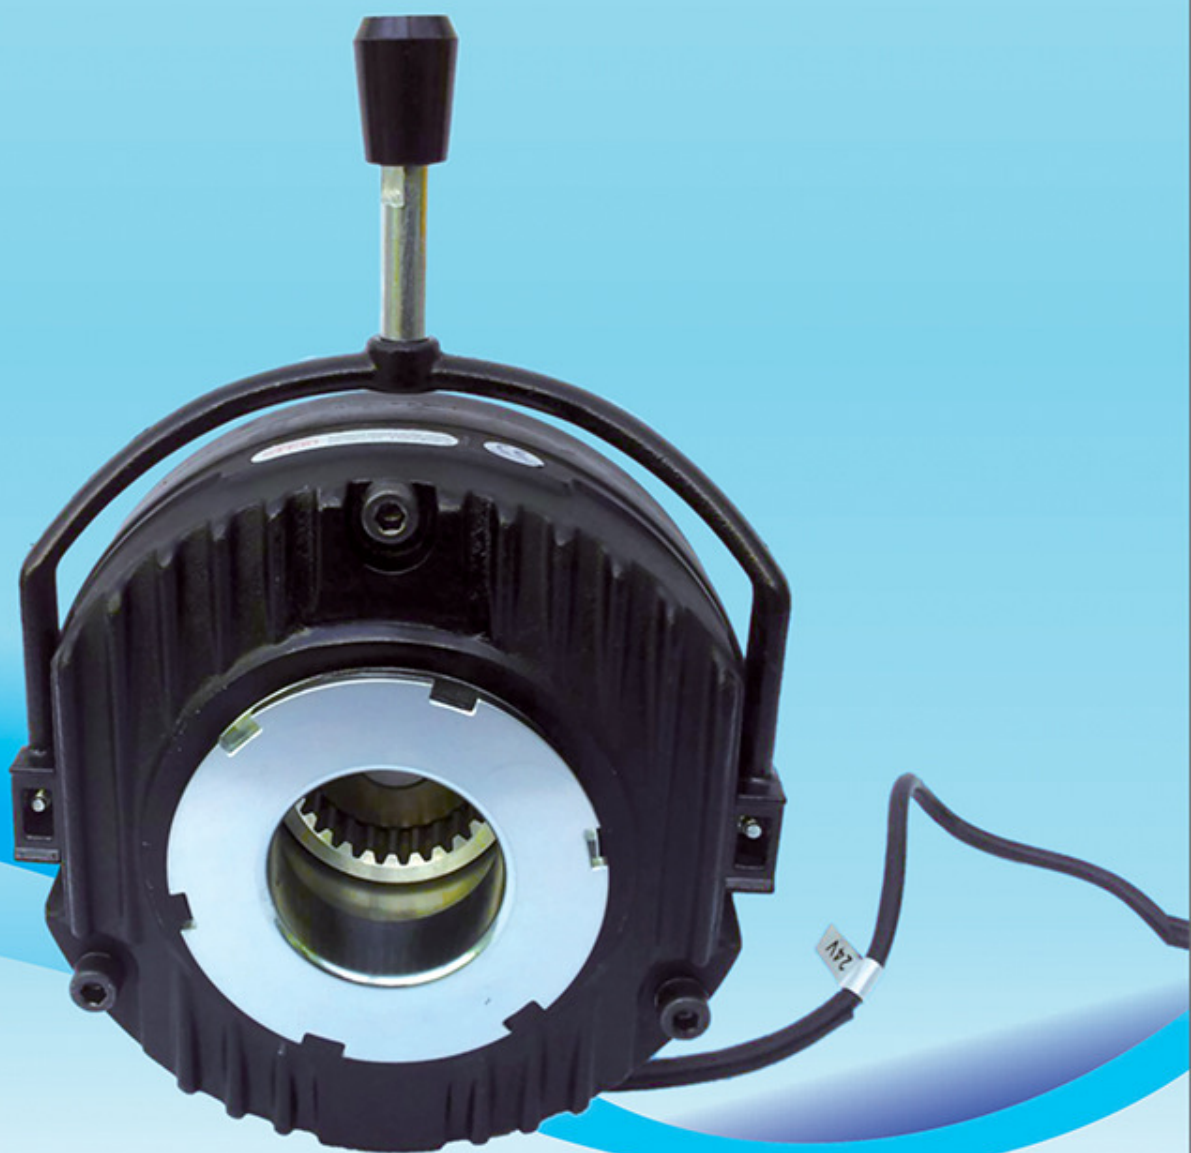

| Modelo | FAB 0.4 | FAB 0.8 | FAB 1.6 | FAB 3.2 | FAB 6 | FAB 8 | FAB 15 | FAB 24 | FAB 48 |
|--|-----------------|-----------|----------|----------|----------|----------|----------|----------|----------|
| Static Friction Torque [kgm](Nm) | 0.4 (4.0) | 0.8 (8.0) | 1.6 (16) | 3.2 (32) | 6.0 (60) | 8.0 (80) | 15 (150) | 24 (240) | 48 (480) |
| GD ² (kgfm ²) x10 ⁻³ | 0.052 | 0.18 | 1.04 | 2.24 | 3.0 | 7.6 | 14.84 | 30.24 | 88.16 |
| Voltage DC-V | (24) (90) (190) | | | | | | | | |
| Power [DC24V](W) at 20°C | 20 | 25 | 30 | 40 | 50 | 65 | 85 | 110 | 110 |
| Weight (kg) | 1.0 | 1.8 | 3.0 | 4.8 | 7.3 | 12.0 | 18.0 | 25.0 | 41.0 |
| Maximum speed (rpm) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |

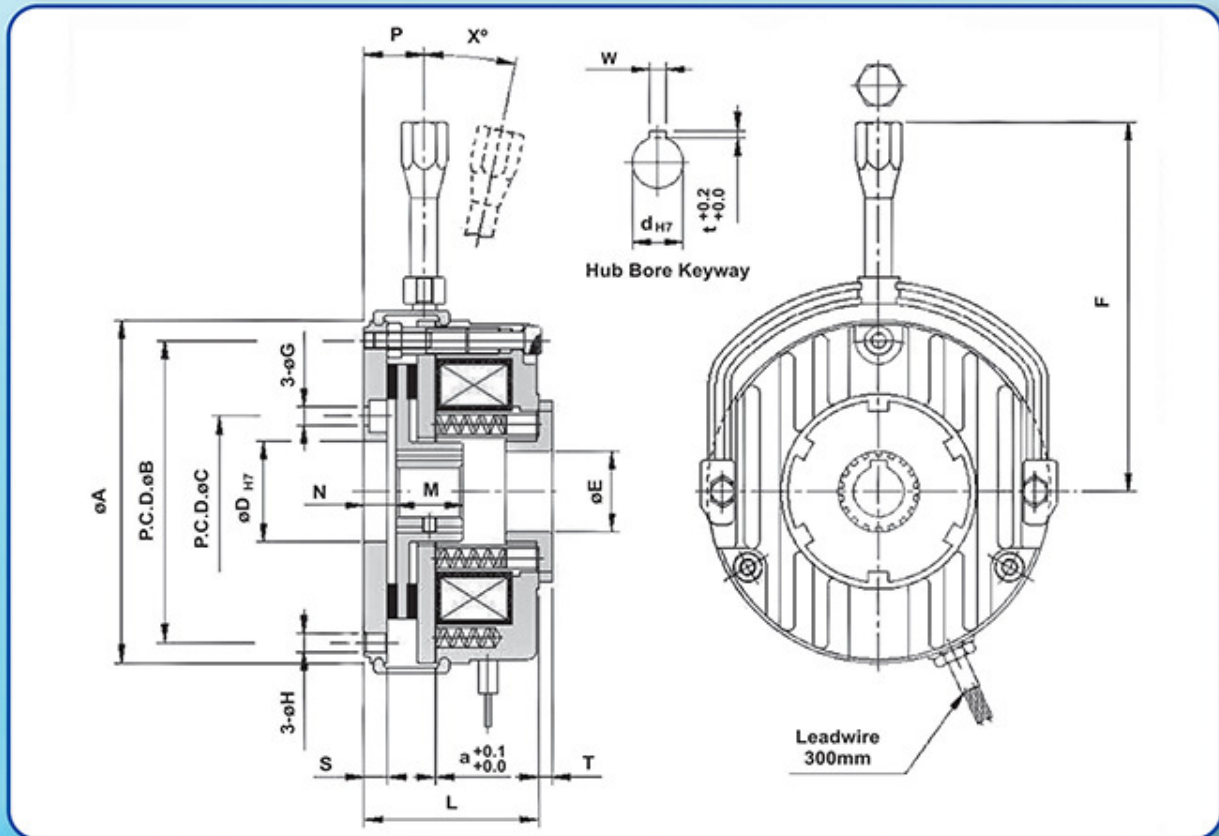

Dimensões

| Modelo | FAB 0.4 | FAB 0.8 | FAB 1.6 | FAB 3.2 | FAB 6 | FAB 8 | FAB 15 | FAB 24 | FAB 48 |
|--------|---------|---------|---------|---------|-------|-------|--------|--------|--------|
| A | 84 | 102 | 127 | 147 | 162 | 188 | 215 | 254 | 302 |
| B | 72 | 90 | 112 | 132 | 145 | 170 | 196 | 230 | 278 |
| C | - | 45 | 56 | 62 | 74 | 84 | 100 | 110 | 140 |
| D | 31 | 30 | 40.3 | 45 | 55 | 65 | 75 | 90.3 | 120.3 |
| E | 19 | 24 | 35 | 40 | 48 | 52 | 62 | 85 | 115 |
| F | 98 | 110 | 140 | 165 | 185 | 220 | 260 | 418 | 504 |
| G | 5 | 5.5 | 6.6 | 6.6 | 9 | 9 | 9 | 11 | 11 |
| H | 5 | 5.5 | 6.6 | 6.6 | 9 | 9 | 9 | 11 | 11 |
| L | 41 | 52 | 59 | 66 | 76 | 84 | 96 | 108 | 119 |
| M | 17 | 20 | 20 | 25 | 30 | 30 | 35 | 37 | 45 |
| N | 8 | 9.5 | 12.5 | 12 | 14 | 14 | 15 | 15 | 17 |
| P | 17.7 | 25 | 25 | 31 | 36 | 31 | 33 | 47 | 70 |
| S | 6 | 7 | 9 | 9 | 11 | 11 | 11 | 11 | 12.5 |
| T | 3 | 4 | 4 | 5 | 5 | 6 | 6 | - | - |
| X | 10° | 8° | 8° | 8° | 8° | 8° | 12° | 12° | 12° |
| a | 0.15 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.4 | 0.4 | 0.5 |
| d | 11 | 15 | 15 20 | 20 25 | 25 30 | 25 30 | 35 40 | 35 40 | 35 |
| w | 4 | 5 | 5 | 5 7 | 7 | 7 | 10 | 10 | 10 |
| t | 1.8 | 2.3 | 2.3 | 2.3 | 3 | 3 | 3 | 3.8 | 3.8 |